



TECHNICAL FEATURES



REFERENCE	1600 B K - 1600 B C - 1600 B K C
DIMENSIONS	1/4" à 1"
MATERIAL	1600 B K : nickel plated steel 1600 B C or 1600 B K C: ceramic shaft
THREAD	Female connections - right-hand - BSPP thread connection with flange
PRESSURE	200 bar Maximum
TEMPERATURE	120° C Maximum
ROTATION	0 to 1500 r.p.m. depending on the diameter and pressure
APPLICATION	Supply of rotating shafts with 1 or 2 fluids, double effect jack command, etc...
OBSERVATIONS	Ball bearing and Teflon seal for easy rotation. Full bore.
CONNECTION	With hoses
USE	Oil, air, water, gas, etc...

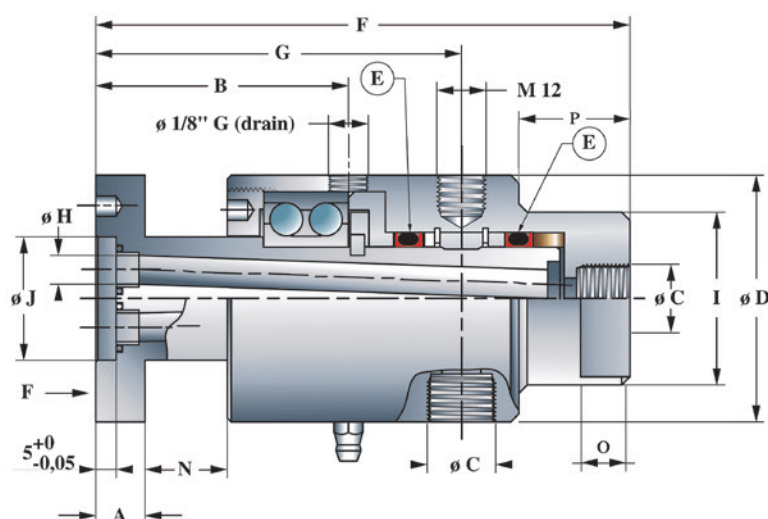

F View

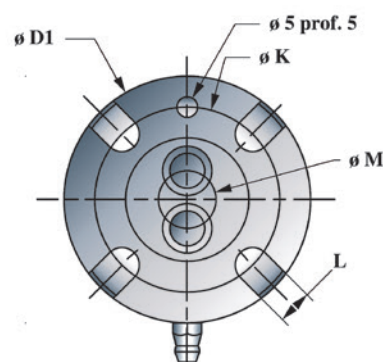

Ø DN		2 x Ø 3,2	2 x Ø 7	2 x Ø 12	2 x Ø 12	2 x Ø 18
Ref.		1619 B K / C	1683 B K / C	1644 B1/2" K / C	1644 B K / C	1760 B K / C
Dimensions	A	12	12	12	12	15
	B	44	61,5	67	67	96,5
	C	1/4"	3/8"	1/2" *	3/4"	1"
	D / D1	50	60	80	80	90 / 99
	E	GR15V	GR25V	GR35V	GR35V	GR50V
	F	97,5	130	165	145	210
	G	64,5	89	98	98	140
	H	3,2	7	12	12	18
	Ø.I / Pts	30/24	42/38	50/45	50/45	60/50
	J H7	20	30	45	45	60
	K	35	45	65	65	80
	L	8,5	8,5	8,5	8,5	10,5
	M	10	14	21	21	29
	N	15	20	20	20	30
	O	10	12	15	15	15
P	12.5	27	25	25	18	

* with reduction

Stainless steel models are available on request

1600 and 1600 B series have a different design depending on the models.

The above drawings show the 1683 and 1683B models.